


Main Characteristics 主要电气参数 gG1000V AC gGB- gLD from 0.8 to 25 A

Size 瓷管代号	Catalog Numbers 订货号	Designation Type 型号规格	Ampere In (A) 电流	Voltage Un(V) 电压	Watts Loss 功耗		Breaking Capacity 分断能力 (KA)
					0.8In(W)	In(W)	
$\Phi 20 \times 127$ Without striker 无指示器	109B2019	B120X- 0.8A 1000V ACgG20*127	0.8A	1000VAC	0.5	0.9	@ 1000 VAC =63kA
	109B2020	B120X- 1A 1000V ACgG20*127	1A	1000VAC	0.5	0.9	
	109B2021	B120X- 1.5A 1000V ACgG20*127	1.5A	1000VAC	0.8	1.4	
	109B2022	B120X- 2A 1000V ACgG20*127	2A	1000VAC	0.9	1.6	
	109B2023	B120X- 3.15A 1000V ACgG20*127	3.15A	1000VAC	1.2	2.1	
	109B2024	B120X- 4A 1000V ACgG20*127	4A	1000VAC	1.3	2.1	
	109B2025	B120X- 5A 1000V ACgG20*127	5A	1000VAC	1.4	2.3	
	109B2026	B120X- 6A 1000V ACgG20*127	6A	1000VAC	3.4	6.3	
	109B2027	B120X- 8A 1000V ACgG20*127	8A	1000VAC	3.3	6.0	
	109B2028	B120X- 10A 1000V ACgG20*127	10A	1000VAC	3.5	6.1	
	109B2029	B120X- 12A 1000V ACgG20*127	12A	1000VAC	3.9	6.8	
	109B2030	B120X- 16A 1000V ACgG20*127	16A	1000VAC	5	8.9	
	109B2031	B120X- 20A 1000V ACgG20*127	20A	1000VAC	5.3	9.6	
	109B2032	B120X- 25A 1000V ACgG20*127	25A	1000VAC	6.6	12	

Dimensions 安装尺寸:

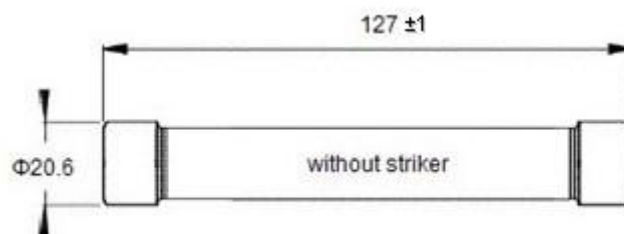


Main Characteristics 主要电气参数 gG2000V AC

gGB - gLD from 0.8 to 25 A

Size 瓷管代号	Catalog Numbers 订货号	Designation Type 型号规格	Ampere In (A) 电流	Voltage Un(V) 电压	Watts Loss 功耗		Breaking Capacity 分断能力 (KA)
					0.8In(W)	0.8In(W)	
$\Phi 20 \times 190$ Without striker 无指示器	109B2040	KG20-0.8A /2000VACgG20*190	0.8A	2000VAC	0.5	0.9	@ 2000 VAC =63kA
	109B2041	KG20-1A /2000VACgG20*190	1A	2000VAC	0.5	0.9	
	109B2042	KG20-1.5A /2000VACgG20*190	1.5A	2000VAC	0.8	1.4	
	109B2043	KG20-2A /2000VACgG20*190	2A	2000VAC	0.9	1.6	
	109B2044	KG20-3.15A /2000VACgG20*190	3.15A	2000VAC	1.2	2.1	
	109B2045	KG20-4A /2000VACgG20*190	4A	2000VAC	1.3	2.1	
	109B2046	KG20-5A /2000VACgG20*190	5A	2000VAC	1.4	2.3	
	109B2047	KG20-6A /2000VACgG20*190	6A	2000VAC	3.4	6.3	
	109B2048	KG20-8A /2000VACgG20*190	8A	2000VAC	3.5	6.5	
	109B2049	KG20-10A /2000VACgG20*190	10A	2000VAC	4.0	7	
	109B2050	KG20-12A /2000VACgG20*190	12A	2000VAC	4.2	8	
	109B2051	KG20-16A /2000VACgG20*190	16A	2000VAC	5.5	10	
	109B2051	KG20-20A /2000VACgG20*190	20A	2000VAC	6	11	
	109B2053	KG20-25A /2000VACgG20*190	25A	2000VAC	7.5	15	

Dimensions 安装尺寸:

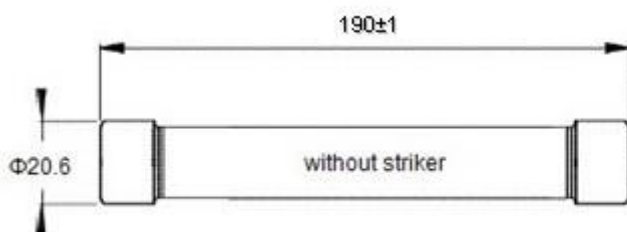

Main Characteristics 主要电气参数 电压等级 1000VAC~2000VAC~3000VDC

Cylindrical fuse holders $\Phi 20 \times 127$ 熔断器配套底座


Can be used as fuse switch disconnectors 1

Size 熔芯瓷管代号 mm×mm	U_e (V)电压 AC	Catalog Numbers 订货号	Weight 重量 (Kg)
$\Phi 20 \times 127$	1000V	KCB20-63A	0.25

Dimensional drawings 安装示意图:



Cylindrical fuse holders
KCB20-63A

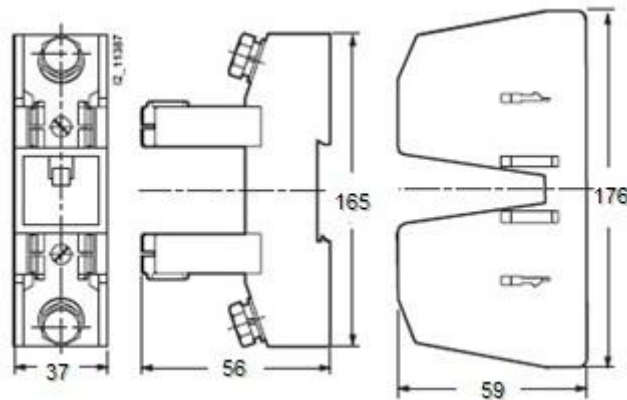

Cylindrical fuse holders KCB20-63A 熔断器底座


Cylindrical fuse holders $\Phi 20 \times 190$ 熔断器配套底座

Size 熔芯瓷管代号 mm×mm	U_e (V)电压 AC/VDC	Catalog Numbers 订货号	Weight 重量 (Kg)
$\Phi 20 \times 190$	2000V~2000V	KCB19-25A	0.36

Dimensional drawings 安装示意图:



Cylindrical fuse holders

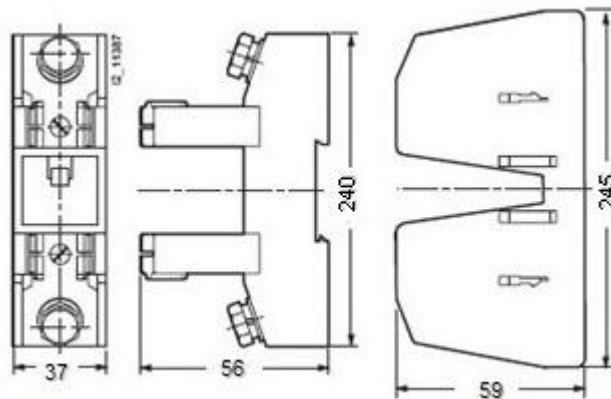

KCB19-25A 熔断器配套底座